Krupp CAN-O-MAT II

rétrécisseur ● bordeuse ● moulureuse ● sertisseuse

The Krupp CAN-O-MAT II (now produced by the Soudronic Group) is a high-speed, modular combination machine used in the metal packaging industry to form and assemble can bodies. The four carousels, having 6 working stations each, are used for: First carousel: Flanging ; Second carousel: Beading; Third carousel: Rail seaming 1; Fourth carousel: Rail seaming 2.

Spécifications techniques

CazProductNuméro CPN	6665
Nom	Krupp CAN-O-MAT II
Outillage	127 mm
Année de construction	1995
Hauteur min. de la boîte	100 mm
Hauteur max. de la boîte	250 mm
Diamètre minimum de la boîte / des fonds	70 mm
Diamètre maximum de la boîte / des fonds	153 mm
Forme de la boîte	round
Vitesse jusqu'à	300 cans per minute

Vidéos

Il n'y a aucune vidéo pour ce produit.


Photos






Follow us:




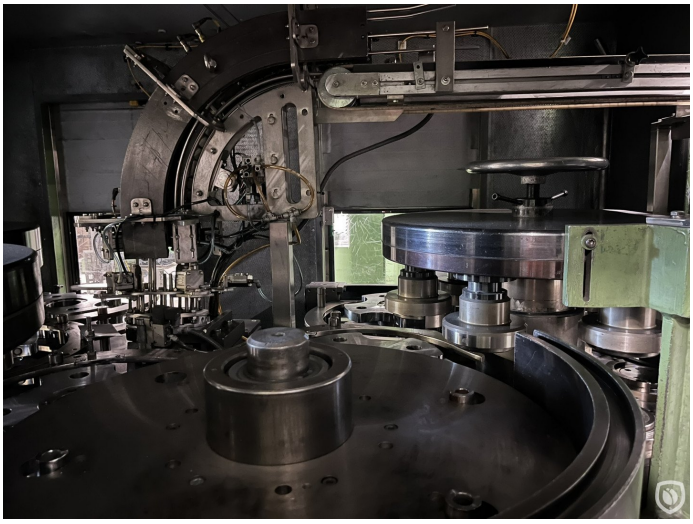

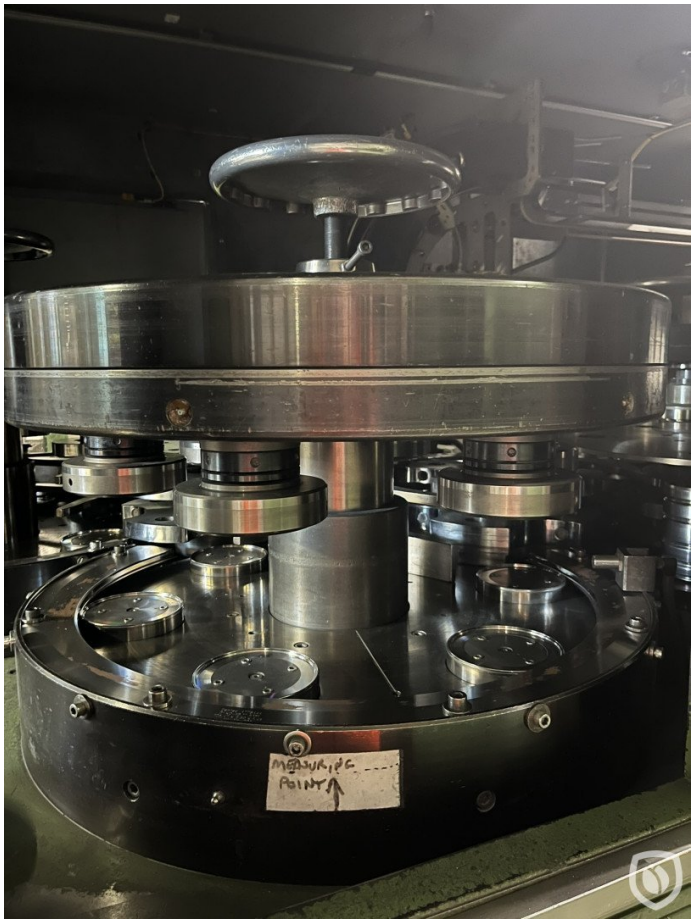

Follow us:



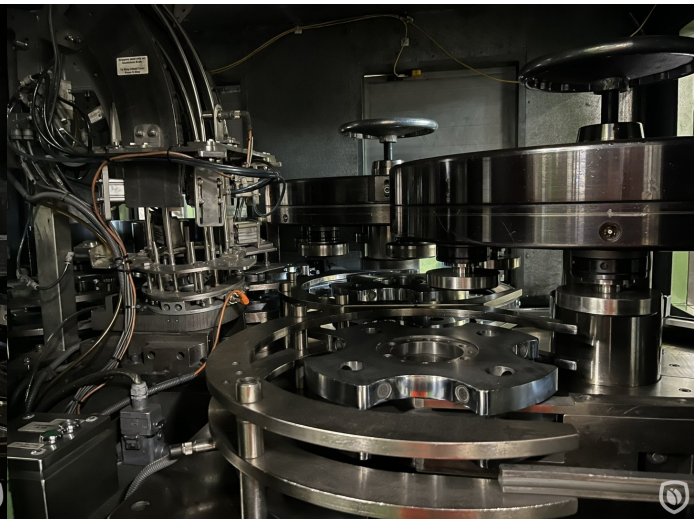





Follow us:


Helenenstraße 149 · D 45143 Essen
Model CAN-O-MAT II Order No. 84-730961
Serial No. 11453
SAP No. 04753522 Built in 1995
Diameter range: 70 - 153 mm
Height range: 100 - 180 mm
Output: 300 cpm
Noise level: 82 dBa
Weight: 11000 kg

Follow us: